


| FISCAL YEAR | JOB NO. | SHEET No. | TOTAL SHEETS |
|-------------|---------|-----------|--------------|
| 1931        | 10-153  | 15        | 16           |

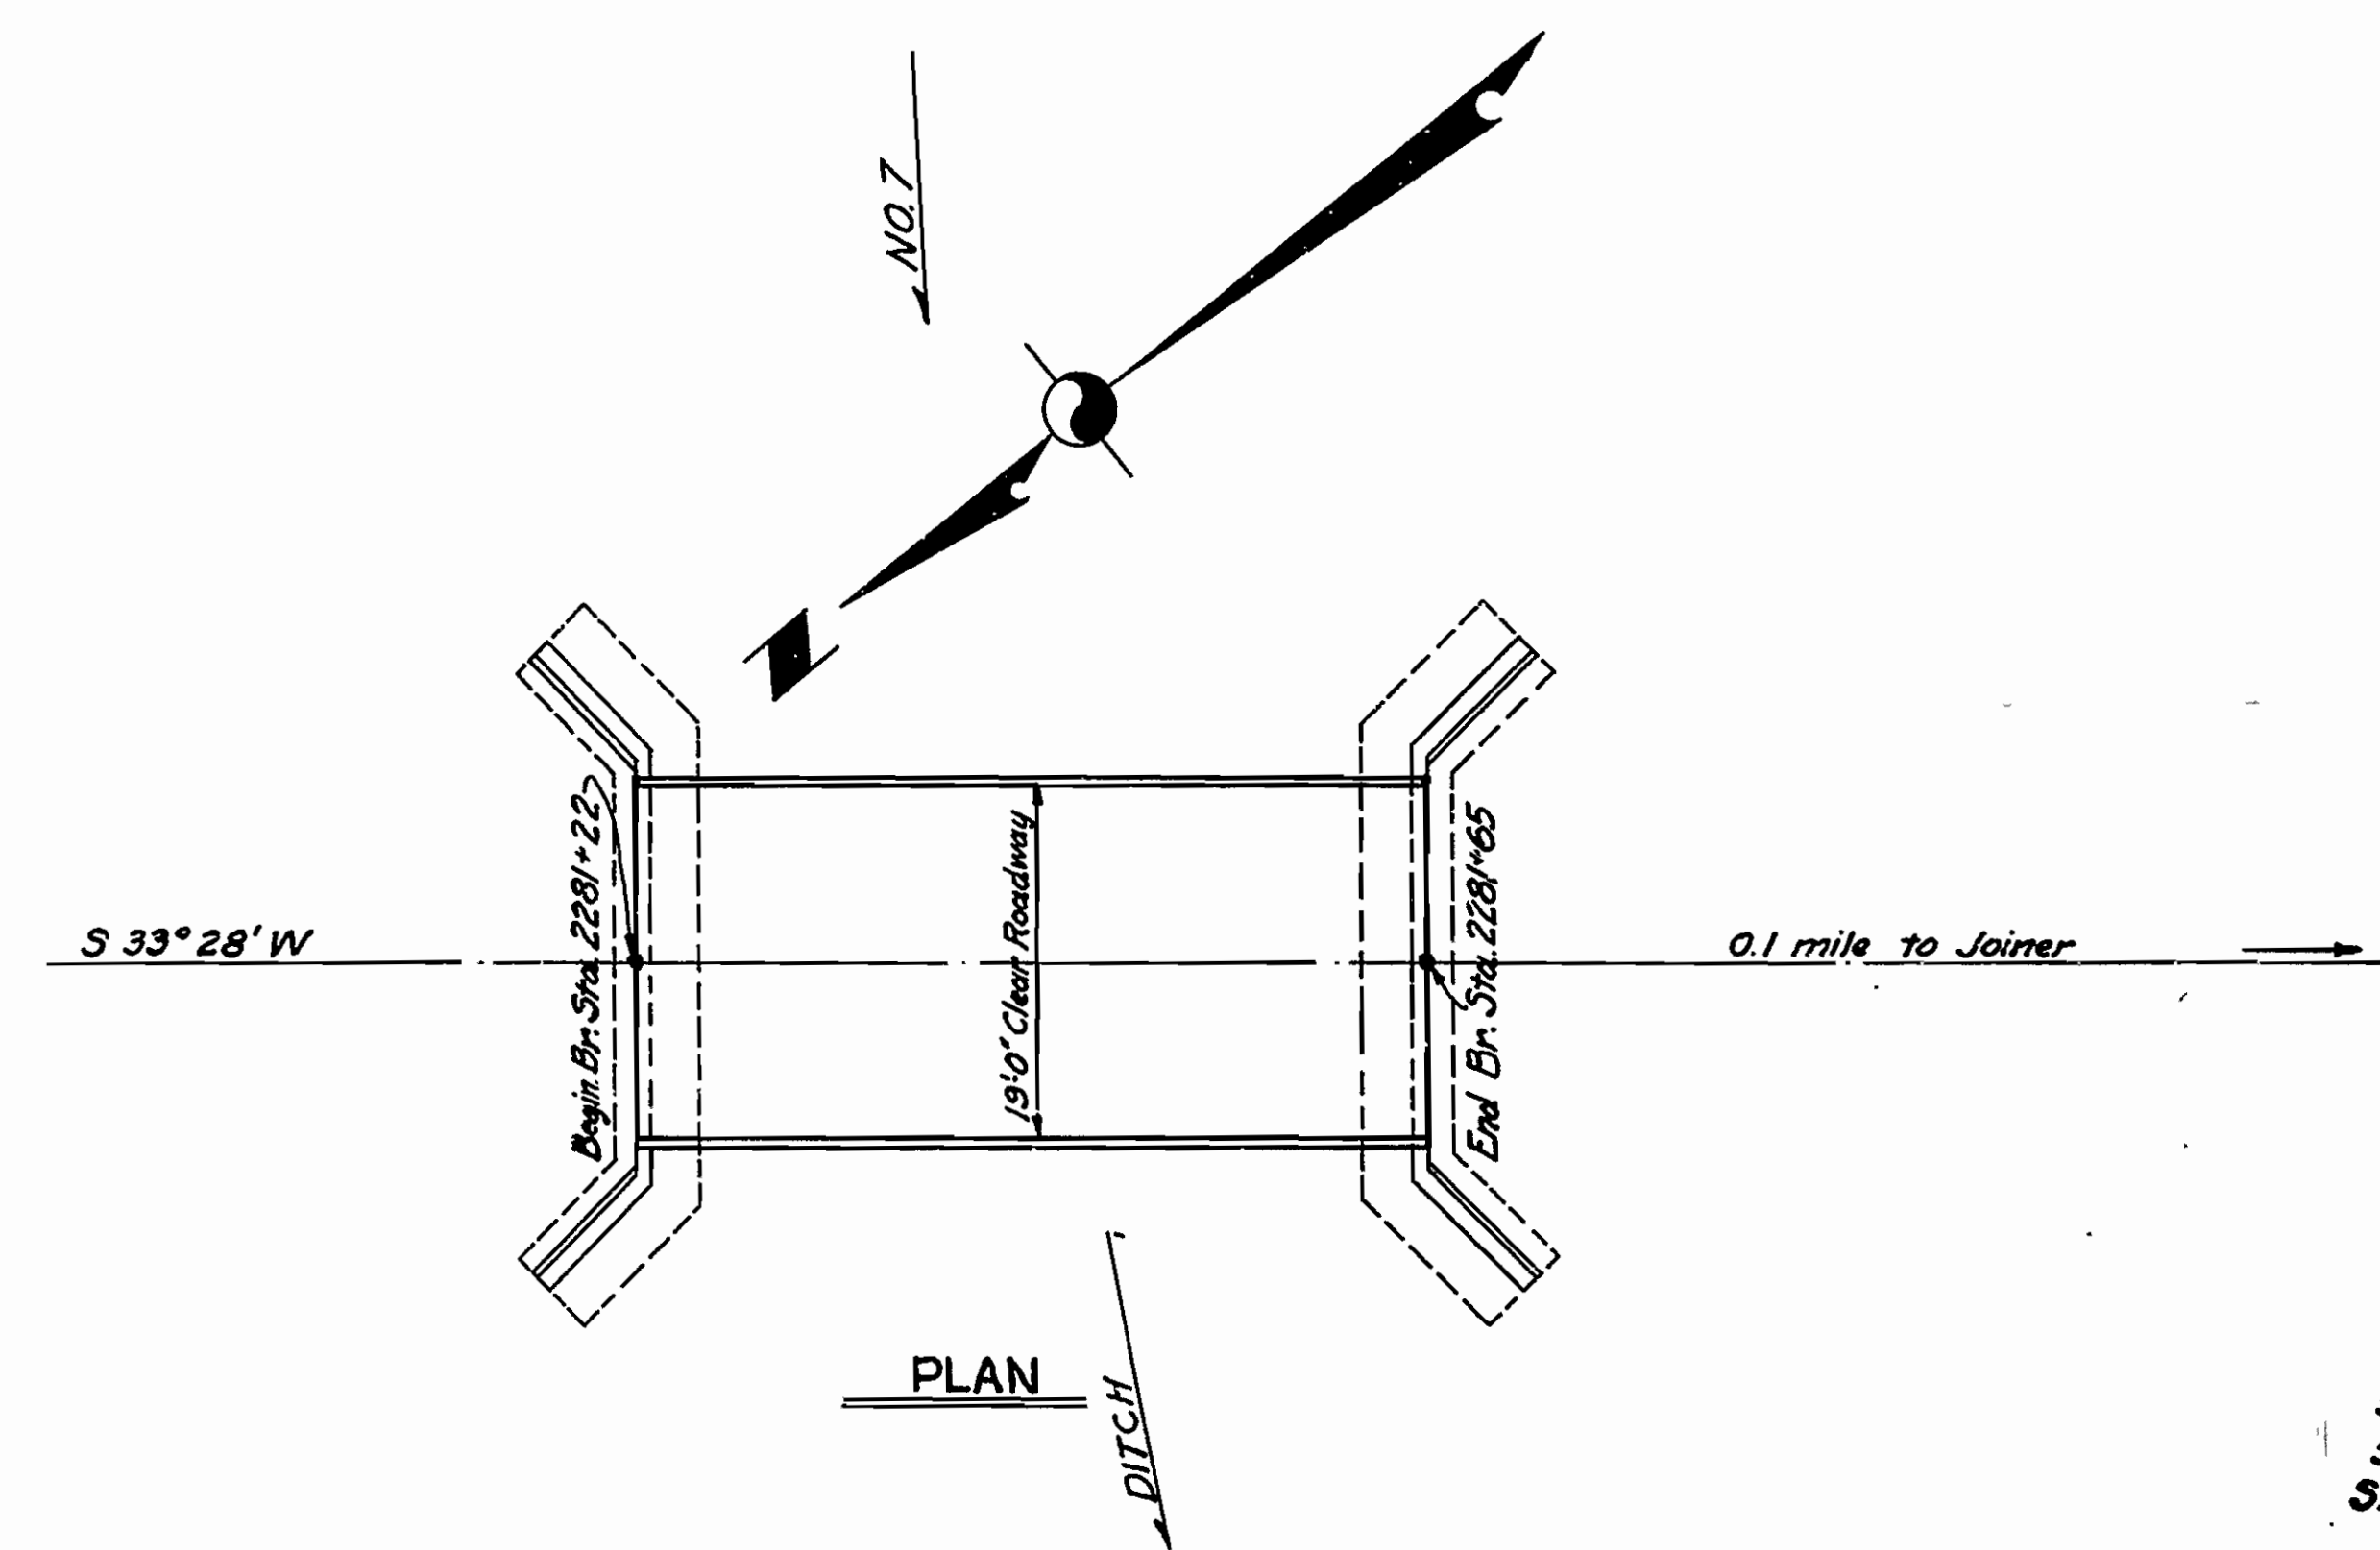


**GENERAL NOTES**

- For details of concrete floor slab see details on drawing no. 3251.
- Straighten rail posts on right side at North end.
- Existing bridge is 40'-0" truss, 19'-0" clear roadway, 4" timber deck, and 3" Warrenite wearing surface.
- Structural steel to be thoroughly cleaned and painted with two (2) coats of aluminum paint, see Special Provisions.
- Clean and grease expansion shoes of trusses.
- Replace timber deck with 6 3/8" concrete slab.
- Traffic to be maintained during construction. See sketch on drawing no. 3238 for method.
- All concrete to be Class "S". All exposed corners to have 3/4" chamfer.
- Reinforcing steel to be deformed bars of structural or intermediate grade.
- Shop list and bending diagrams must be submitted and approved before fabrication is begun.
- Roadway drains are to be paid for unit price bid for reinforcing steel.
- Specifications: Arkansas State Standard Road and Bridge Specifications adopted May 30, 1925 and revised, together with Special Provisions as listed on title sheet.

**QUANTITIES**

|      |                                    |          |        |
|------|------------------------------------|----------|--------|
| 54   | Class "S" Concrete                 | 23.23    | cu.yd. |
| 55   | Reinforcing Steel                  | 45.92    | lbs.   |
| S.P. | Re-Conditioning Existing Structure | Lump Sum |        |

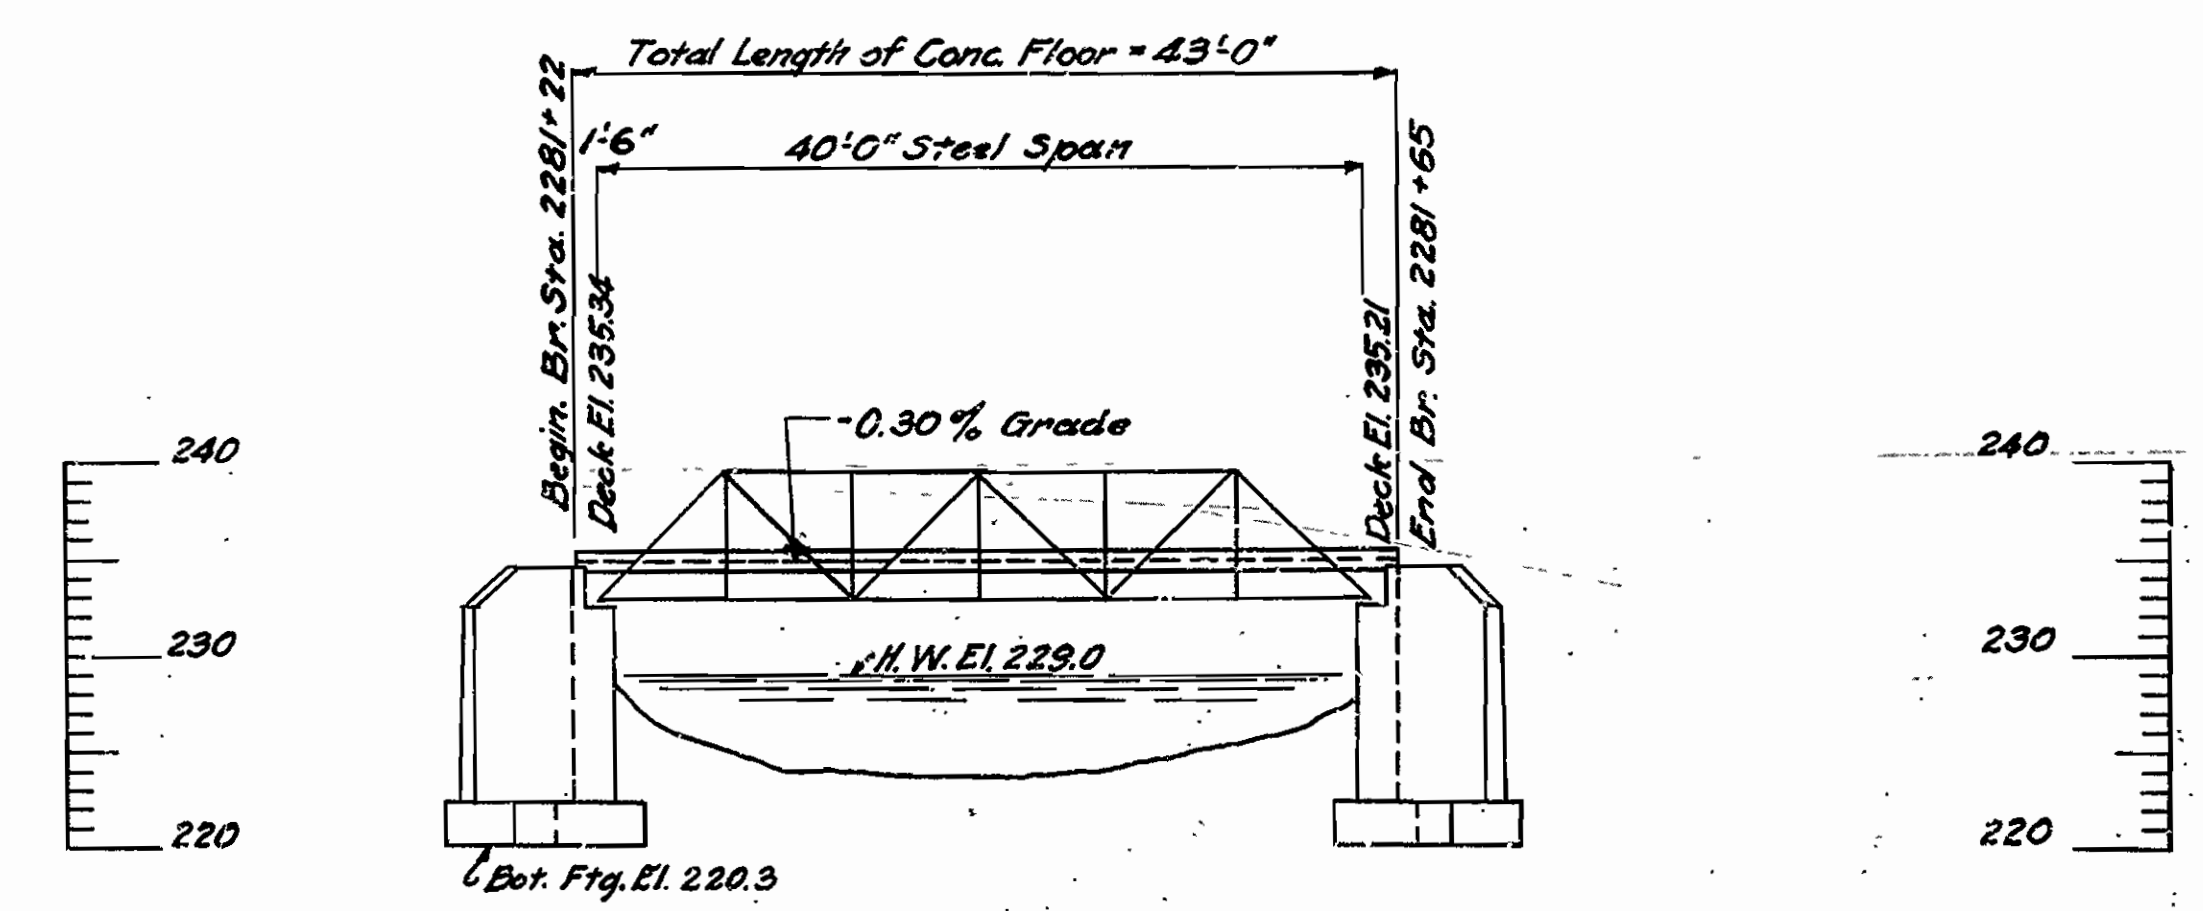

B.M. Elev. 234.27  
Center of top of wing wall  
H.W. abutment Sta. 2281+22

**ELEVATION BR. 1267**

Drainage Area 3.4 sq. mi.  
very flat country

**LAYOUT**  
BRIDGE OVER DRAINAGE DITCH No. 7  
Sta. 2281+22 to Sta. 2281+65  
NORTH AND SOUTH ROAD  
MISSISSIPPI COUNTY  
ROUTE 61 SEC. 2  
**ARKANSAS STATE HIGHWAY COMMISSION**  
LITTLE ROCK, ARK.  
Scale: 1 in. = 10 ft.  
DRAWING NO. 3250