

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
				JOB NO.	061434		1	17

2 MILITARY RD. RR SIG. UPGRADE & TRAFFIC SIG. (NLR) (S)

ARKANSAS STATE HIGHWAY AND TRANSPORTATION DEPARTMENT
CONSTRUCTION PLANS FOR STATE HIGHWAY


MILITARY RD. RR SIG. UPGRADE &
TRAFFIC SIG. (NLR) (S)

PULASKI COUNTY

JOB 061434


FED. AID PROJ. RPD-9315(49)

NOT TO SCALE

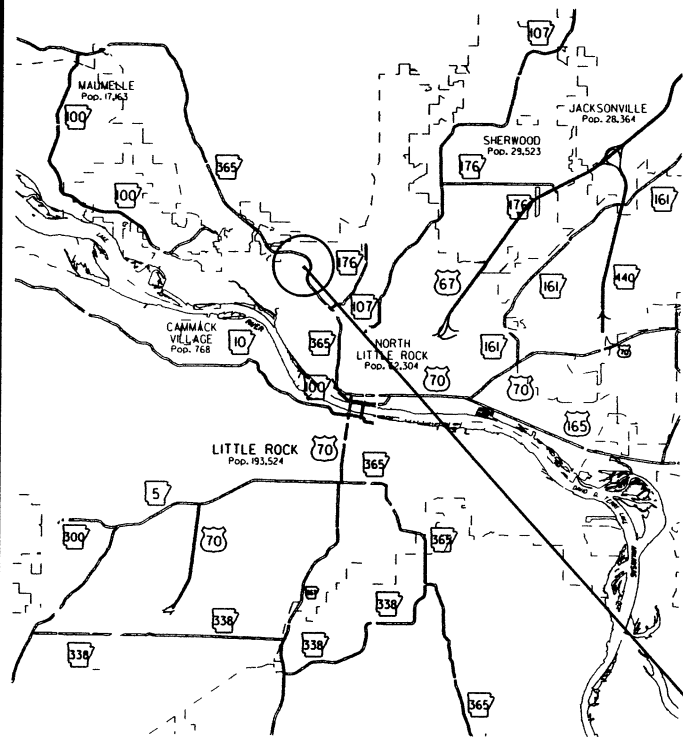


VICINITY MAP

PROJECT LOCATION

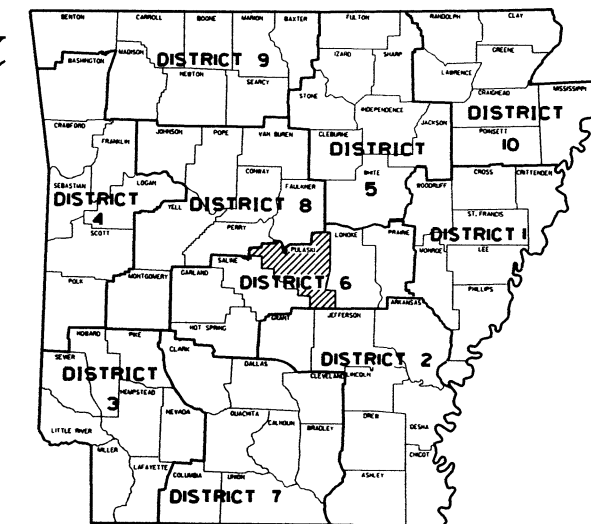

ARK. HWY. DIST. NO. 6

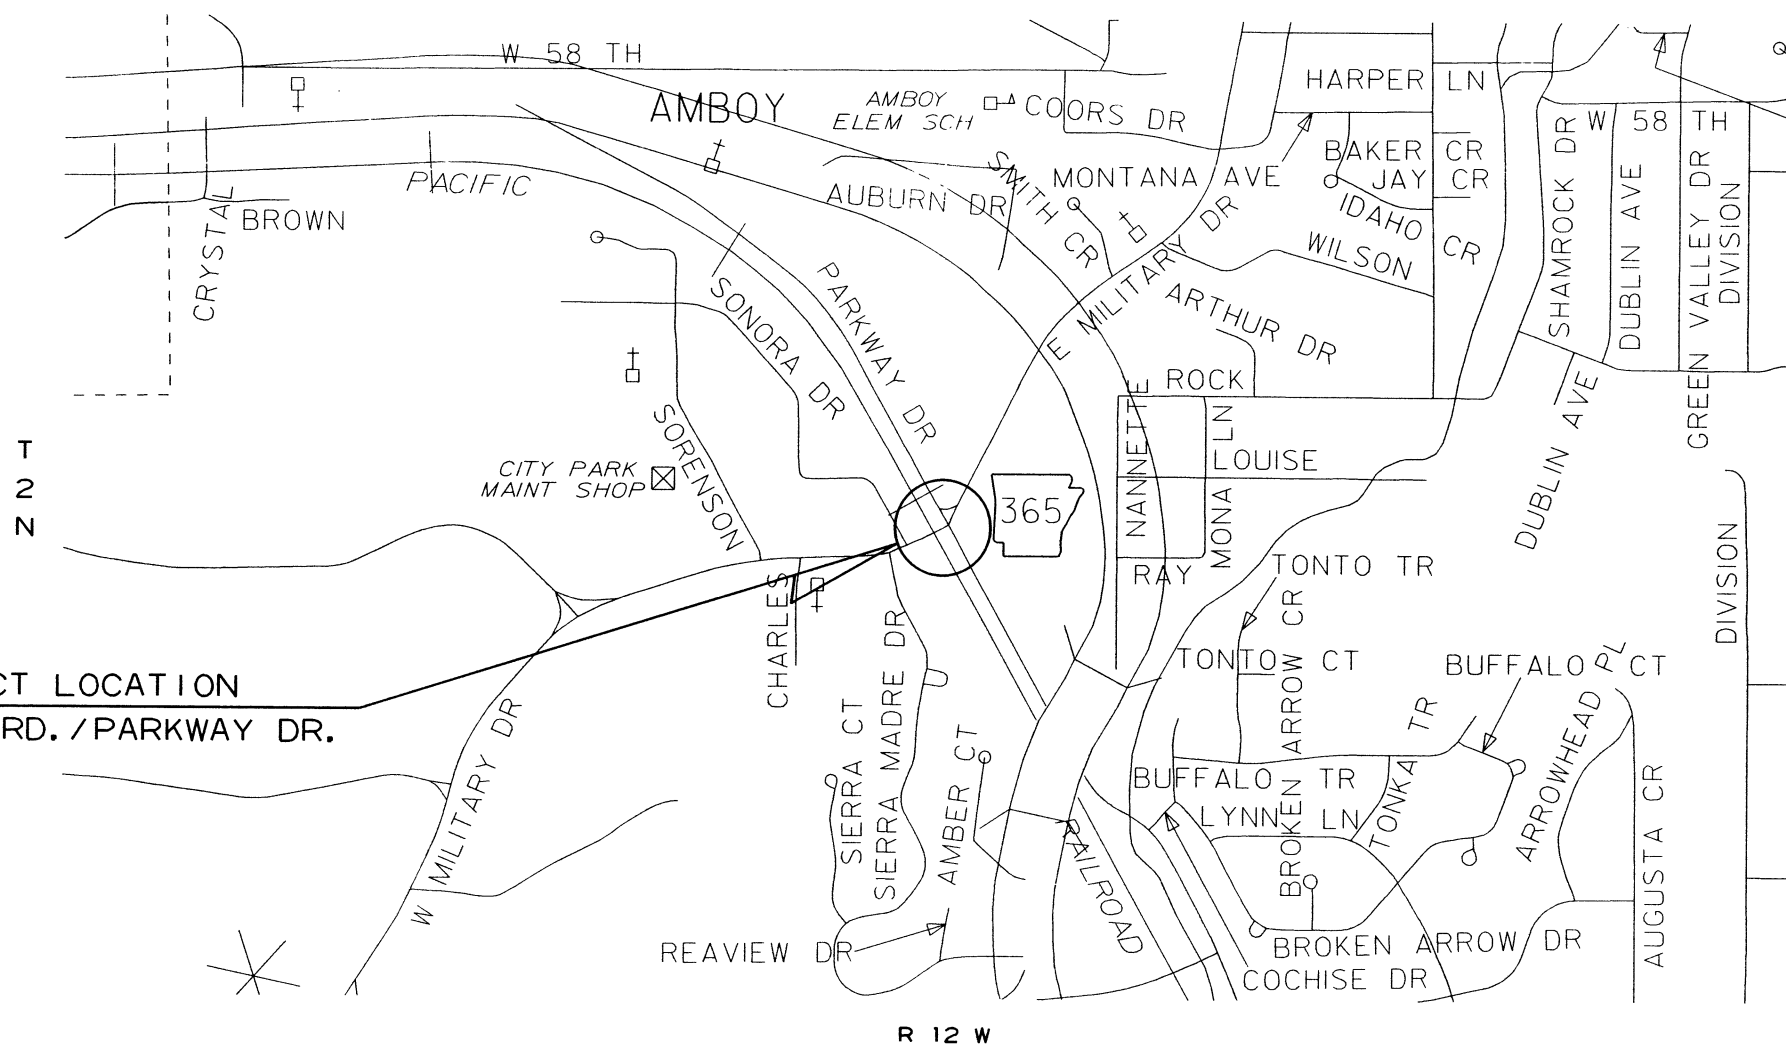

PROJECT LOCATION
MILITARY RD./PARKWAY DR.

MID-POINT OF PROJECT	
LATITUDE	N 34°48'14"
LONGITUDE	W 92°17'35"

R 12 W




APPROVED



2-2-17
DEPUTY DIRECTOR
AND CHIEF ENGINEER

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						061434	2	17

② INDEX OF SHEETS AND STANDARD DRAWINGS



INDEX OF SHEETS

SHEET NO.	TITLE
1	TITLE SHEET
2	INDEX OF SHEETS AND STANDARD DRAWINGS
3	GOVERNING SPECIFICATIONS AND GENERAL NOTES
4	INTERSECTION IMPROVEMENT DETAIL
5	MAINTENANCE OF TRAFFIC
6	PERMANENT PAVEMENT MARKING DETAIL
7 - 8	QUANTITIES
9	SUMMARY OF QUANTITIES AND REVISIONS
10 - 11	SURVEY CONTROL DETAILS
12	TRAFFIC SIGNAL NOTES
13	TRAFFIC SIGNAL QUANTITIES
14 - 17	SIGNALIZATION PLAN SHEETS


ROADWAY STANDARD DRAWINGS

DRWG.NO.	TITLE	DATE
CG-1	CURBING DETAILS	11-29-07
DR-1	DETAILS OF DRIVEWAYS & ISLANDS	02-27-14
PM-1	PAVEMENT MARKING DETAILS	06-01-17
RRS-1	PAVEMENT MARKING FOR RAILROAD CROSSING	12-08-16
SD-5	CONTROLLER CABINET UTILITY DRAWER	09-12-13
SD-6	HEAVY DUTY PULL BOX	09-02-15
SD-8	SIGNAL HEAD PLACEMENT	12-08-16
SD-9	SERVICE POINT	09-12-13
SD-11	STEEL POLE WITH MAST ARM	12-08-16
TC-1	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	04-13-17
TC-2	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	09-02-15
TC-3	STANDARD TRAFFIC CONTROLS FOR HIGHWAY CONSTRUCTION	09-02-15
TEC-1	TEMPORARY EROSION CONTROL DEVICES	12-15-11
WR-1	WHEELCHAIR RAMPS NEW CONSTRUCTION AND ALTERATIONS	11-10-05

LOCATION: MILITARY DRIVE/PARKWAY DRIVE
 CITY: NORTH LITTLE ROCK
 COUNTY: PULASKI
 DISTRICT: 6 SCALE: N/A DRAWN BY: GWE

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.			
						061434	3	17

② GOVERNING SPECS. AND GENERAL NOTES



GOVERNING SPECIFICATIONS

ARKANSAS STATE HIGHWAY COMMISSION STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, EDITION OF 2014, AND THE FOLLOWING SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS:

NUMBER	TITLE
ERRATA	ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS
FHWA-1273	REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
FHWA-1273	SUPPLEMENT - WAGE RATE DETERMINATION
100-3	CONTRACTOR'S LICENSE
102-2	ISSUANCE OF PROPOSALS
108-1	LIQUIDATED DAMAGES
108-2	WOK ALLOWED PRIOR TO ISSUANCE OF WORK ORDER
303-1	AGGREGATE BASE COURSE
400-1	TACK COATS
410-1	CONSTRUCTION REQUIREMENTS AND ACCEPTANCE OF ASPHALT CONCRETE PLANT MIX COURSES
604-1	RETROREFLECTIVE SHEETING FOR TRAFFIC CONTROL DEVICES IN CONSTRUCTION ZONES
JOB 061434	BIDDING REQUIREMENTS AND CONDITIONS
JOB 061434	BROADBAND INTERNET SERVICE FOR ASPHALT CONCRETE PLANT
JOB 061434	CABINET DRAWER ASSEMBLY
JOB 061434	CARGO PREFERENCE ACT REQUIREMENTS
JOB 061434	DOCUMENTATION OF PAYMENTS MADE TO DISADVANTAGED BUSINESS ENTERPRISES
JOB 061434	EDGE CARD VIDEO PROCESSOR
JOB 061434	ELECTRICAL CONDUCTORS FOR LUMINAIRES
JOB 061434	ELECTRICAL CONDUCTORS-IN-CONDUIT
JOB 061434	EMERGENCY BATTERY BACKUP SYSTEM INSTALLATION
JOB 061434	FIBER OPTIC BLANK OUT SIGN
JOB 061434	INSURANCE, CONSTRUCTION, AND FLAGGING REQUIREMENTS ON RAILROAD PROPERTY (UPRR)
JOB 061434	LED COUNTDOWN PEDESTRIAN SIGNAL HEAD
JOB 061434	LED LUMINAIRE ASSEMBLY (BUG U0 TYPE)
JOB 061434	LED TRAFFIC SIGNAL HEAD
JOB 061434	MANDATORY ELECTRONIC CONTRACT
JOB 061434	MANDATORY ELECTRONIC DOCUMENT SUBMITTAL
JOB 061434	SERVICE POINT ASSEMBLY (TRAFFIC CONTROL DEVICES)
JOB 061434	STREET NAME SIGN (MAST ARM MOUNTED)
JOB 061434	SUBMISSION OF ASPHALT CONCRETE HOT MIX ACCEPTANCE TEST RESULTS
JOB 061434	SYSTEM LOCAL CONTROLLER
JOB 061434	UTILITY ADJUSTMENTS
JOB 061434	VIDEO DETECTOR (COLOR)
JOB 061434	WARM MIX ASPHALT

GENERAL NOTES




- GRADE LINE DENOTES FINISHED GRADE WHERE SHOWN ON PLANS.
- ALL PIPE LINES, POWER, TELEPHONE, AND TELEGRAPH LINES TO BE MOVED OR LOWERED BY THE RESPECTIVE OWNERS AS PER AGREEMENT WITH SUCH OWNERS.
- ANY EQUIPMENT OR APPURTENANCE THAT INTERFERES WITH THE PROPOSED CONSTRUCTION AND WHICH MAY BE THE PROPERTY OF UTILITY SERVICE ORGANIZATIONS SHALL BE MOVED BY THE OWNERS UNLESS OTHERWISE PROVIDED.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING U. S. MAILBOXES WITHIN THE PROJECT LIMITS IN SUCH A MANNER THAT THE PUBLIC MAY RECEIVE CONTINUED MAIL SERVICE. PAYMENT WILL BE CONSIDERED INCLUDED IN THE PRICE BID FOR THE VARIOUS BID ITEMS.
- ALL LAND MONUMENTS LOCATED WITHIN THE CONSTRUCTION AREA SHALL BE PROTECTED IN ACCORDANCE WITH SECTION 107.12 OF THE STANDARD SPECIFICATIONS.
- ALL TREES THAT DO NOT DIRECTLY INTERFERE WITH THE PROPOSED CONSTRUCTION SHALL BE SPARED AS DIRECTED BY THE ENGINEER. CARE AND DISCRETION SHALL BE USED TO INSURE THAT ALL TREES NOT TO BE REMOVED SHALL BE HARMED AS LITTLE AS POSSIBLE DURING THE CONSTRUCTION OPERATIONS.
- UNLESS OTHERWISE INDICATED, ALL DIMENSIONS SHOWN ARE TO THE FACE OF CURB.
- THIS PROJECT IS COVERED UNDER A SECTION 404 NATIONWIDE 14 PERMIT. REFER TO SECTION 110 OF THE STANDARD SPECIFICATIONS, EDITION OF 2014, FOR PERMIT REQUIREMENTS.
- ALL FLEXIBLE BASE AND ASPHALTIC PAVEMENTS REMOVED SHALL BE PAID FOR UNDER THE ITEM NO. 210 - UNCLASSIFIED EXCAVATION.
- THE EXISTING ASPHALT PAVEMENT TO BE REMOVED FROM THE REMAINING PAVEMENT SHALL BE SEPARATED BY SAWING ALONG A NEAT LINE. AFTER SAWING, THE PAVEMENT TO BE REMOVED SHALL BE CAREFULLY REMOVED IN A MANNER THAT WILL NOT DAMAGE THE PAVEMENT THAT IS TO REMAIN. ANY DAMAGE OF THE ASPHALT PAVEMENT THAT IS TO REMAIN IN PLACE SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.

LOCATION: MILITARY DRIVE/PARKWAY DRIVE
CITY: NORTH LITTLE ROCK
COUNTY: PULASKI
DISTRICT: 6 SCALE: N/A DRAWN BY: GWE

DATE: 04-04-17 FILE NAME: t061434_job.dgn

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.		4	17

② INTERSECTION IMPROVEMENT DETAIL

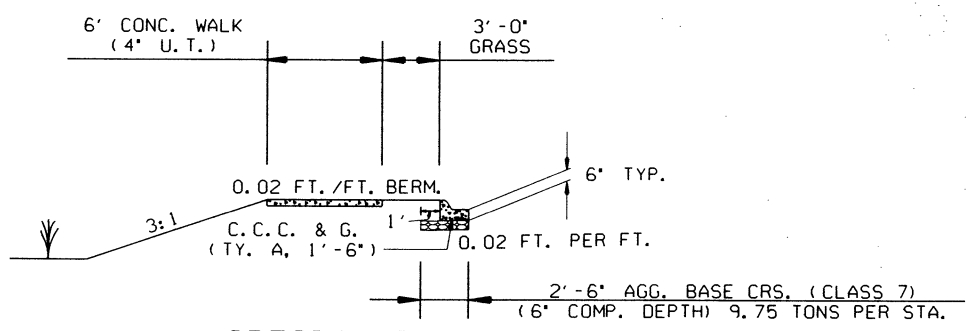



SPECIAL DETAIL
STA. 107+10.84 - STA. 107+32.18
ON LEFT

STA. 107+39.65 - CONST.
TYPE 2 WHEELCHAIR RAMP
= 10 SQ. YD. ON RT.


STA. 106+66.40 - CONST.
TYPE 4 WHEELCHAIR RAMP
= 11 SQ. YD. ON RT.

STA. 107+32.18 - CONST.
TYPE 3 WHEELCHAIR RAMP
= 4 SQ. YD. ON RT.

STA. 105+97.32 - CONST.
APPROACH ON RT. = 5 CU. YD.

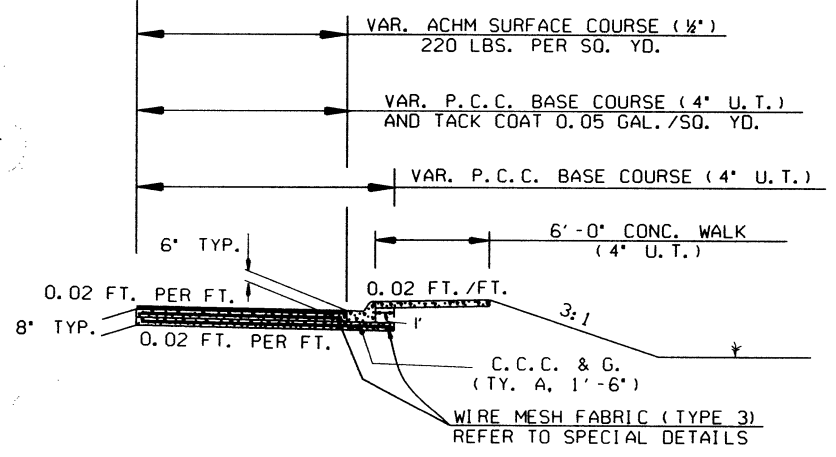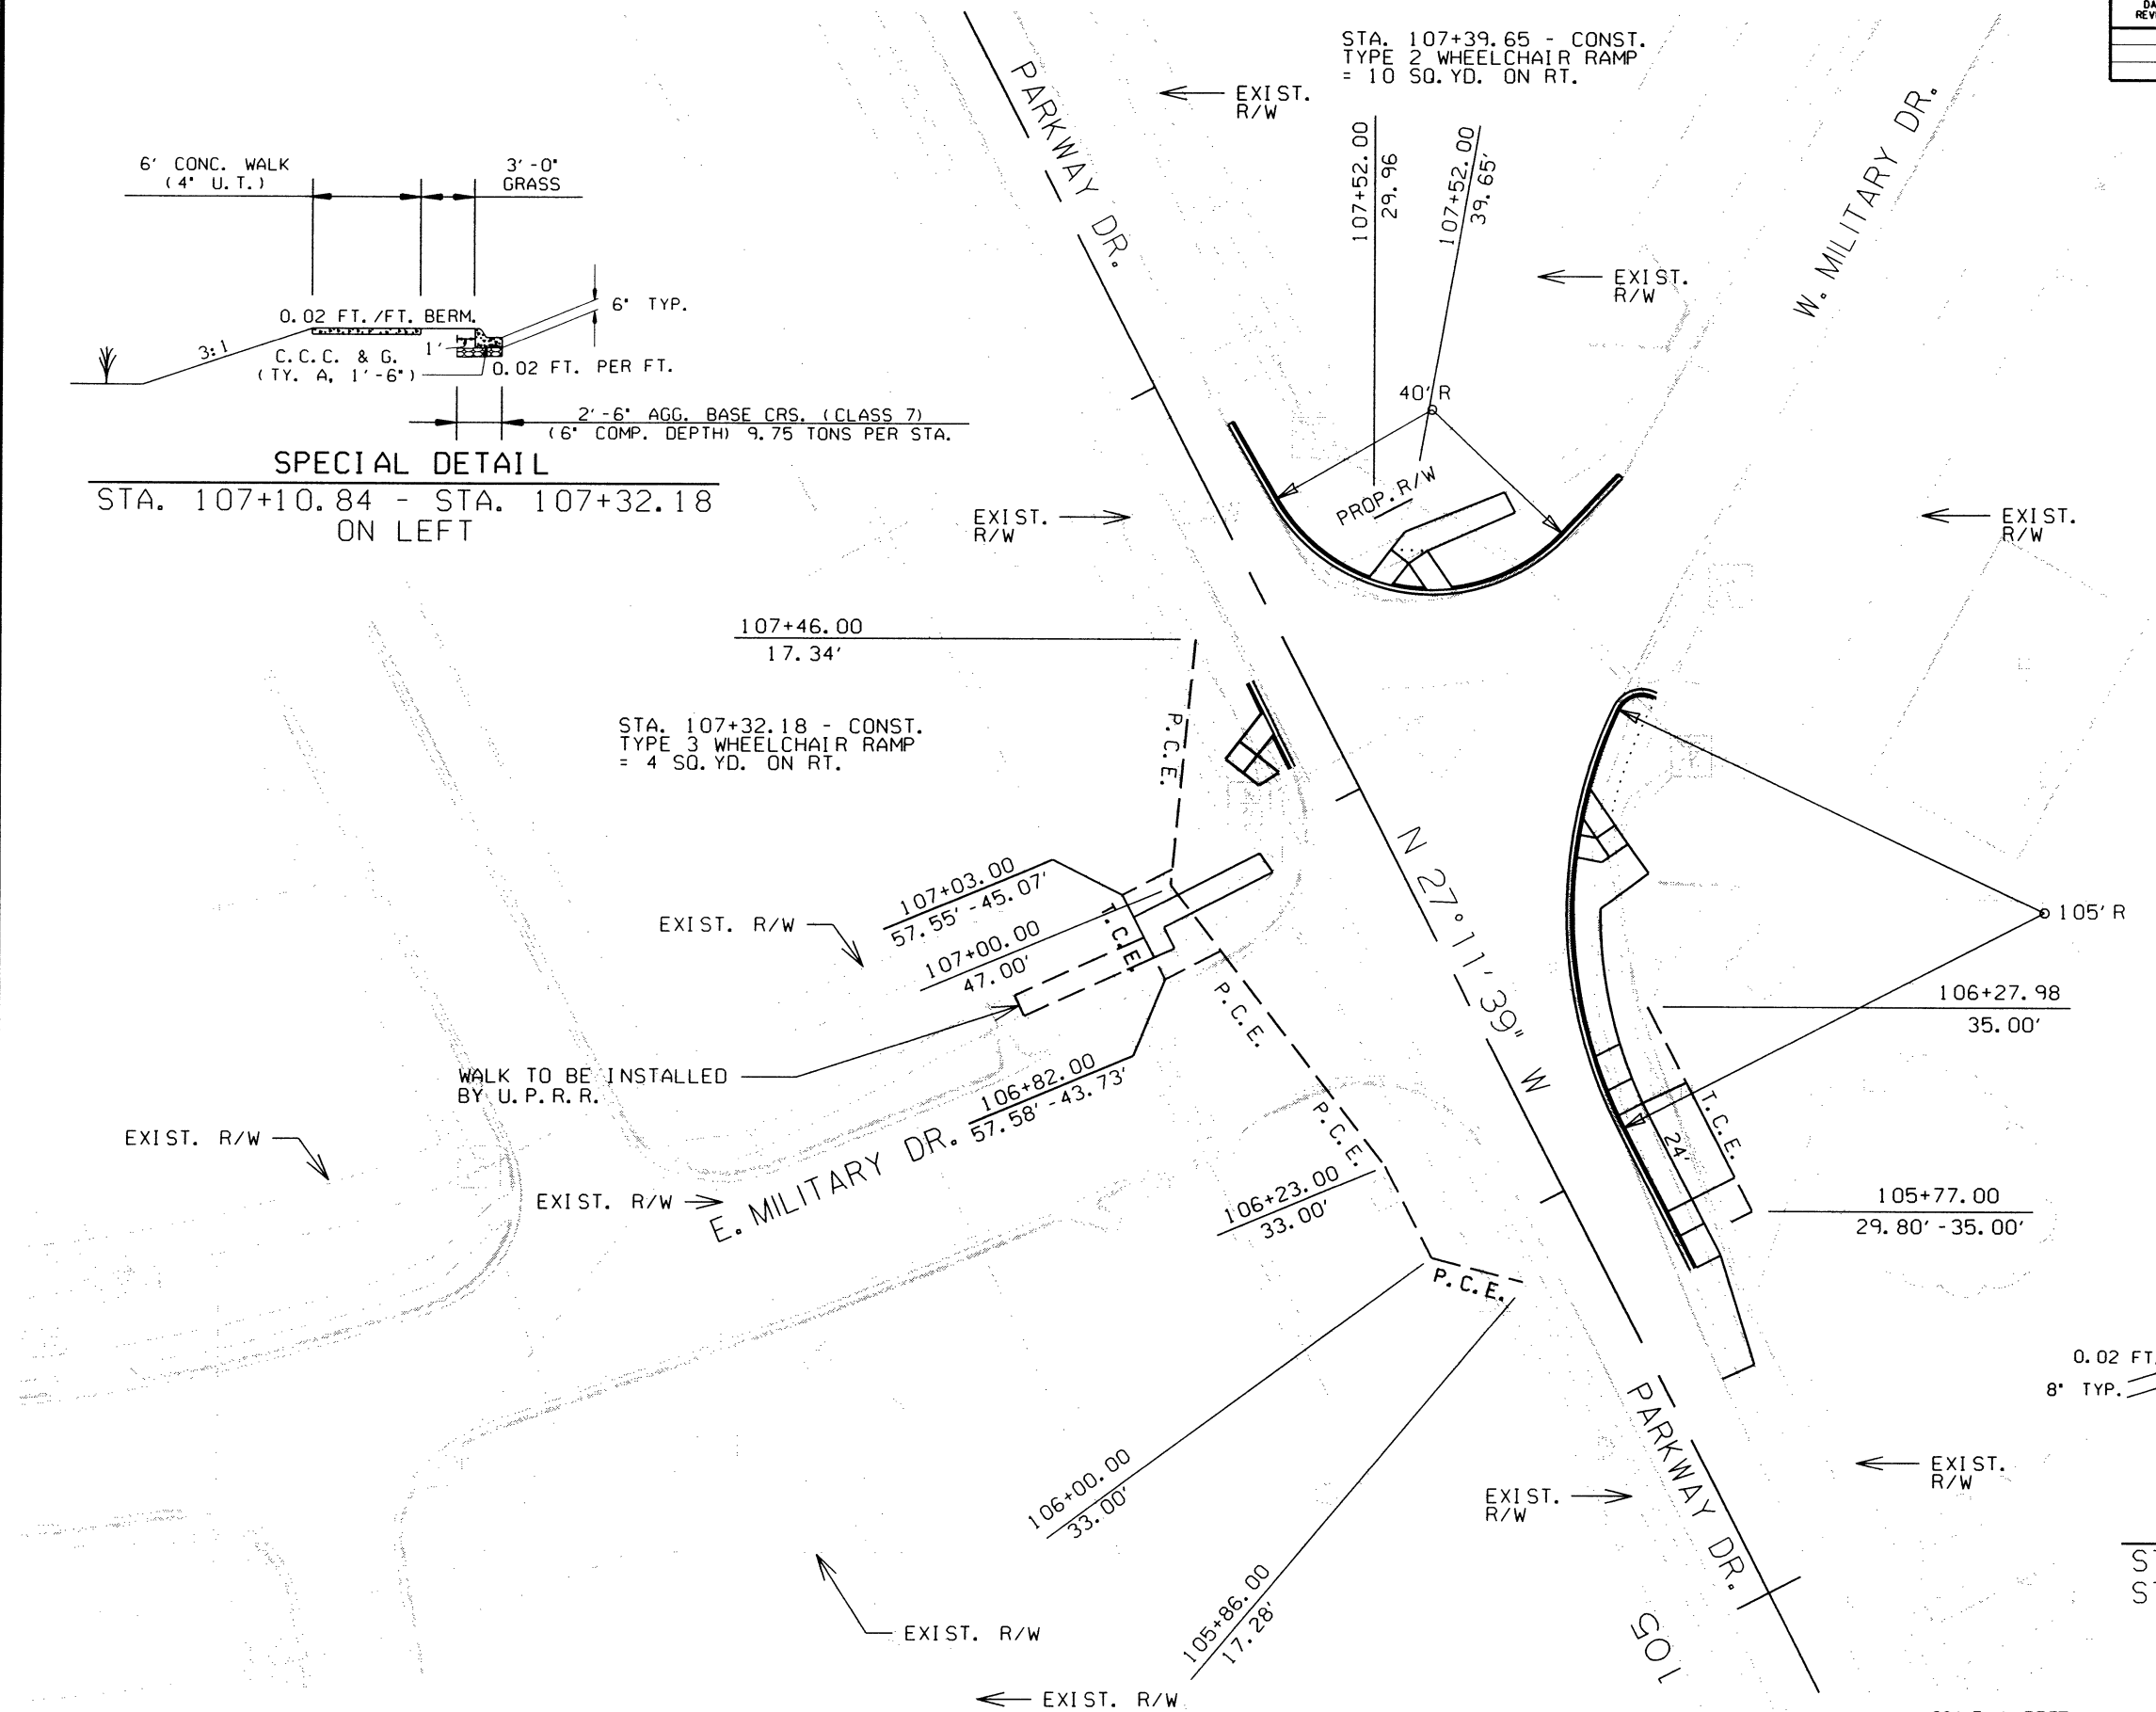

SPECIAL DETAIL
STA. 105+46.45 - STA. 106+92.00
STA. 107+26.61 - STA. 107+85.35
ON RIGHT




DATE: 01-26-17 FILE NAME: t061434.dgn


LOCATION: MILITARY DRIVE/PARKWAY DRIVE
CITY: NORTH LITTLE ROCK
COUNTY: PULASKI
DISTRICT: 6 SCALE: 1" = 40' DRAWN BY: GWE

DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. RD. DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
				6	ARK.		5	17

② MAINTENANCE OF TRAFFIC



NOTE TO CONTRACTOR:
 REMOVE ALL CONFLICTING PAVEMENT MARKINGS INCLUDING SKIPS WITHIN MILITARY DR./PARKWAY DR. INTERSECTION. PLACE ADVANCE SIGNS BASED ON TABLE 2C-4 OF THE M. U. T. C. D. 100 FEET FROM THE BEGINNING OF WORK ZONE.

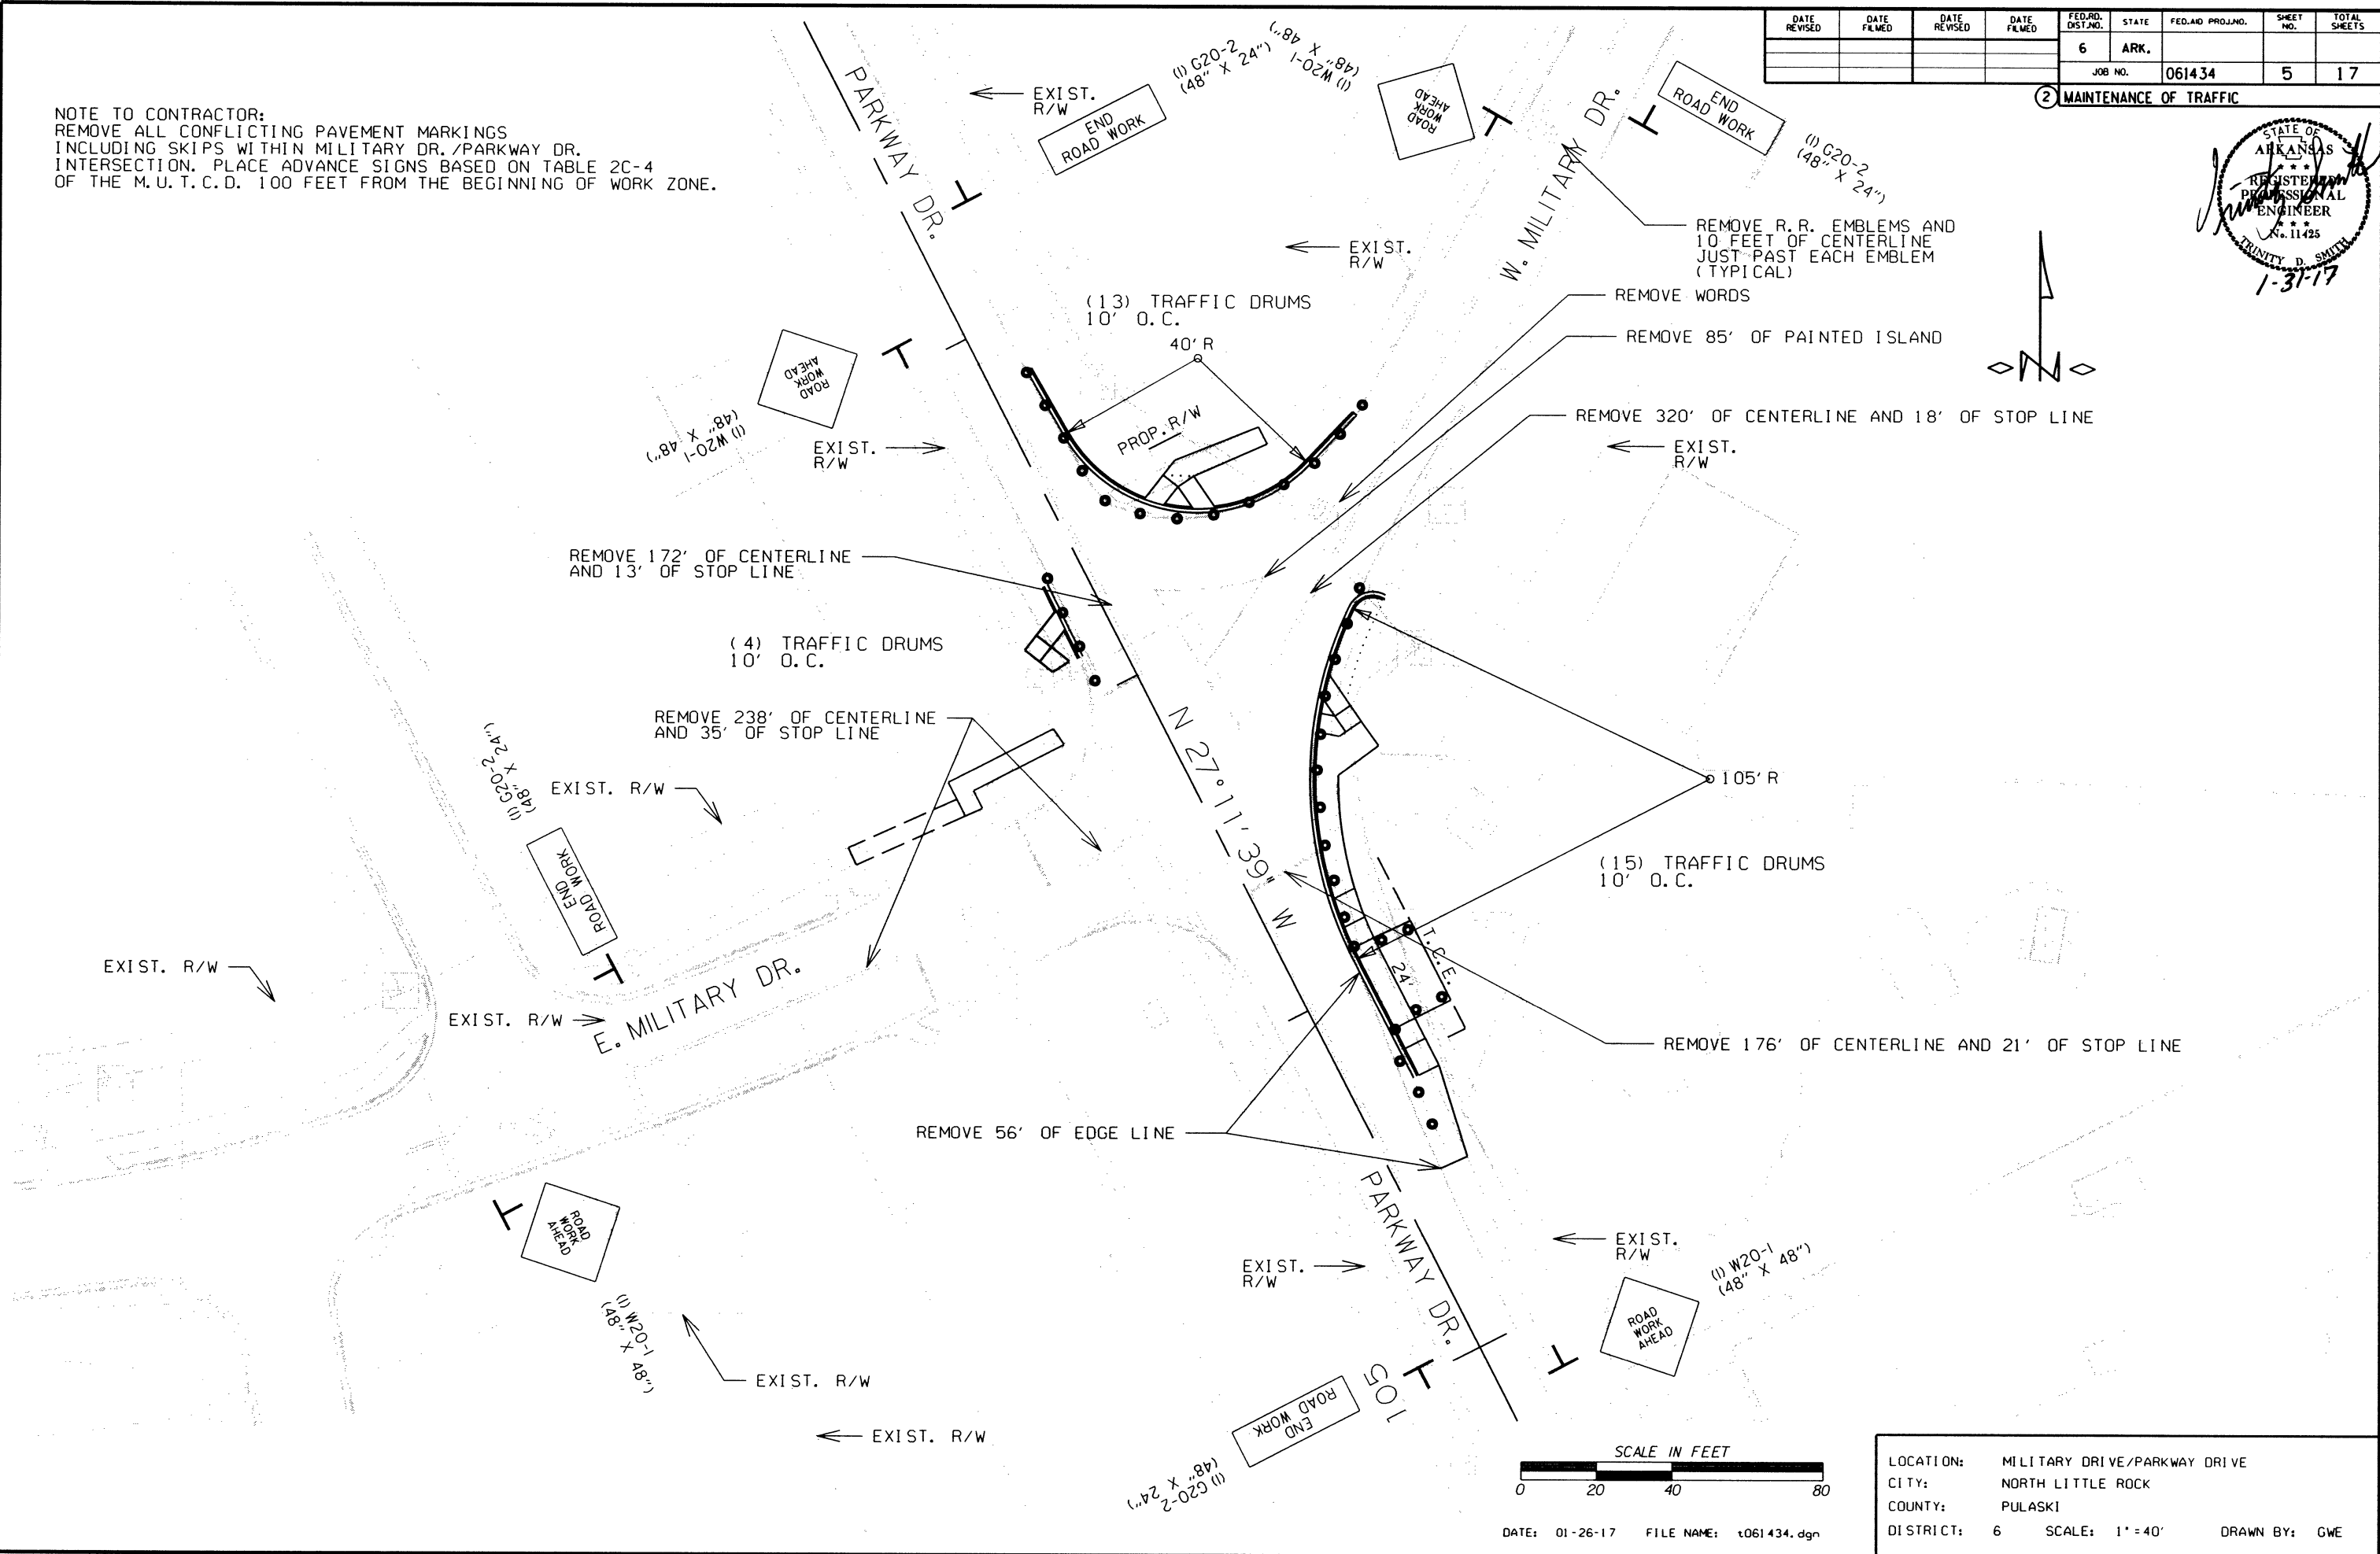

LOCATION: MILITARY DRIVE/PARKWAY DRIVE
 CITY: NORTH LITTLE ROCK
 COUNTY: PULASKI
 DISTRICT: 6 SCALE: 1" = 40' DRAWN BY: GWE